


RGB 5 cores

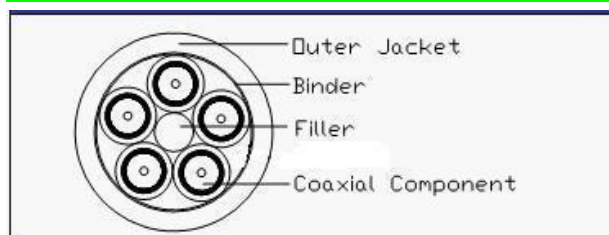

RGB 5 cores Construction

	Material	Diameter (mm)
Inner Conductor	BC	0.57
Dielectric	Foam PE	2.54
Out Conductor	AL Foil+ TC Braiding	95%
One core Jacket	PVC	4.00
Binder	paper wrap	11.00
Out jacket	PVC	13.70

Electrical Characteristics

Impedance (Ω)	75
Nominal Capacitance (pF/m)	59
Velocity of Propagation(%)	78
Sparker Test	4000
SRL(dB)	20

Attenuation (@20°C)

Frequency (MHZ)	Max Attenuation (dB/100ft)	Max Attenuation (dB/100m)
10	1.29	4.23
270	5.92	19.42
360	6.70	21.98
720	9.47	31.06
1000	11.16	36.60
1500	13.67	44.84
2000	15.78	51.76
2500	16.74	54.91
3000	19.33	63.40